

Easy Strapper





Easy Strapper ES-5

Automatic strapping machine for PP strap



MORE INFO

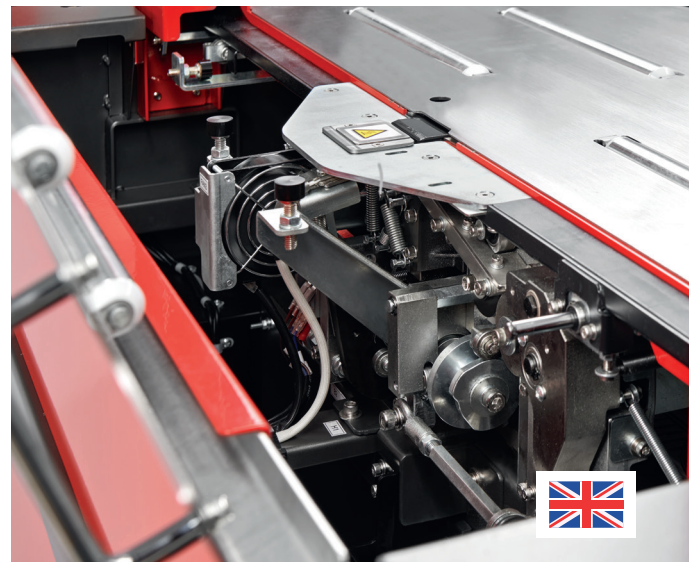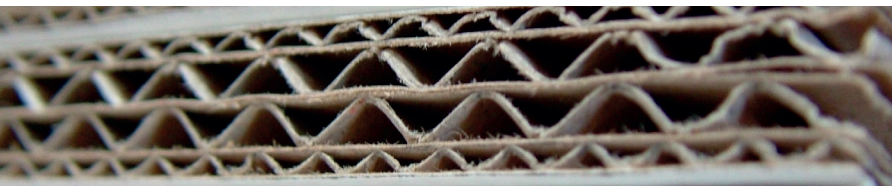

What the Easy Strapper can do for you:

Features

- Automatic strapping machine for 5 - 12 mm PP strap
- Frame sizes from 650 x 500 mm to 1450 x 600 mm
- Maintenance-free welded unit
- Maintenance-free direct drives
- Power supply 230V, 1 Ph, 50Hz
- Strap coil safe & secure within the machine frame
- Maintenance-free, mechanical reel brake
- Work height 820 mm
- Four swivel castors, including two brake castors
- Solid foot bar at the front
- Enclosed strap guide, power controlled

Function

- Automatic strap feeding
- Automatic strap end ejection
- Automatic strap ring ejection
- Electronic tension control, strap tension adjustable up to 35 kg
- Soft tension: can be selected directly via soft tension button
- Easy coil change, pull-out via telescopic rails and quick release screw
- Swivel-mounted control panel, for front and side operation
- Operating modes: manual, single, continuous
- Multilingual display: English + local language
- Table sensor for soft tension, automatic operation and for safety
- CE conformity, certified safety

Technical specifications

Performance	Up to 37 cycles/min
Frame sizes Width x Height (mm)	650 x 500, 850 x 600, 1050 x 600, 1250 x 600, 1450 x 600
Work height	820 mm
Straps	5/6; 8/9; 12 mm PP strap
Minimum size of package	70 x 20 x 5 mm
Measurements & weight (for 850 x 600 mm)	1130 x 1550 x 619 mm, approx 192 kg
Table load capacity	45 kg
Table depth	629 mm
Strapping Core	Ø 200 mm - 190 mm
Power consumption	0,6 kW
Power supply	230V, 1 Ph, 50Hz

Options

- Foot bar on the rear side
- Multifunctional electric down-holder (Patent pending)
- Mechanical rear stopper
- Mechanical side stopper
- Adjustable working height (820 - 910 mm)

Measurements

